# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/US05/009767

International filing date: 24 March 2005 (24.03.2005)

Document type: Certified copy of priority document

Document details: Country/Office: US

Number: 60/558,214


Filing date: 31 March 2004 (31.03.2004)

Date of receipt at the International Bureau: 25 April 2005 (25.04.2005)

Remark: Priority document submitted or transmitted to the International Bureau in

compliance with Rule 17.1(a) or (b)



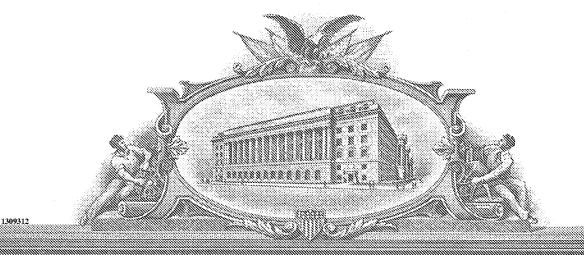

## '4'(d) Anil (100) Vancous (1000) Series (Course)

#### UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

April 18, 2005

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE.

APPLICATION NUMBER: 60/558,214

FILING DATE: March 31, 2004

RELATED PCT APPLICATION NUMBER: PCT/US05/09767

Certified by

Under Secretary of Commerce for Intellectual Property and Director of the United States Patent and Trademark Office

PRO	VISIONAL A	PPLIC	ATIO	N CO	VER SH	EET		PTO ₽
The a Request for filing a PROVISION.	AL APPLICATION u	nder 35 CF	FR 1.53 (c	).				U.S. 821
Doc			cket Number 62844		Type a plus inside this		30/55 30/55	
70	INVENTO	OR(s)/Al	PPLICA	NT(s)				22
LAST NAME	FIRST NAMI		MIDDLE INITIAL					
Dettloff Null  **  Additional inventors	Marvin Marty	on sonare	L. J.	Lake Jackson, Texas, United States of America Lake Jackson, Texas, United States of America				
	LE OF THE IN							
<del></del>	PROCESS FOR PRE					<u> </u>		<del> </del>
<u> </u>	CORRESP							
THE DOW CHEMICAL COMPANY Intellectual Property P. O. Box 1967 Midland, MI 48641-1967 U.S.A.			Telephone: 989-636-2540  Fax: 989-636-3237					
ENCLO	OSED APPLICA	TION P	ARTS (	check a	all that ap	ply)		
	mber of Pages 14		☐ Sr	nall Enti	ty Statemen	t		
☐ Drawing(s) Nu	mber of Sheets		Other (specify)					
	METHOD O	F PAYM	IENT (	check o	ne)			
☐ A check or money order is enclosed to ☐  The Commissioner is hereby authorized filing fees and credit Deposit Account N	filing fees		PROVISIONAL FILING FEE \$160.0 AMOUNT			60.00		
The invention was made by an agency of  No Yes, the name of the U.S. Gov						ncy of the United	States G	overnment
Respectfully submitted,								
Memia C. Damo	cles					G NO.: EV331- arch 31, 2004	475906U	JS

mhy

Phone No.:

Nemia C. Damocles Registration No.:

28,368

989-636-9928

# PROVISIONAL APPLICATION FILING ONLY

30

#### PROCESS FOR PREPARING 1,3-DICHLOROACETONE

#### Background of the Invention

The present invention relates to a process for preparing 1,3-dichloroacetone and epichlorohydrin.

It is known to prepare 1,3-dichloroacetone by the direct chlorination of acetone with chlorine. See, for example, U.S. Patent 4,251,467. The process involves the use of iodine or iodine salts in greater than catalytic amounts. 10 Iodine is very expensive (\$13/kilo according to the 9/23/02 issue of The Chemical Marketing Reporter). For this reason, it is very important to recover and recycle the iodine or iodine salts in the process. The extra steps of recovering and recycling the iodine or iodine salts add significant 15 complexity for building a commercially viable process for a commodity-type product. Another method for directly chlorinating acetone involves using methanol instead of iodine or an iodine salt. However, the major product of this process is the ketal of the chlorinated species. To get the 20 1,3-dichloroketone, one must hydrolyze the ketal which is not a trivial process.

It would be desirable to provide a process for preparing 1,3-dichloroacetone which would eliminate the need for using iodine and all the associated complexity of recovering and recycling it, as well as eliminate the need for hydrolyzing the ketal in the case of the latter method.

#### SUMMARY OF THE INVENTION

In a first aspect, the present invention is a process for preparing 1,3-dichloroacetone which comprises (1) chlorinating acetone to form monochloroacetone, and (2) disproportionating the monochloroacetone in the presence of a platinum catalyst to produce acetone and 1,3-dichloroacetone.

25

30

Additionally, a strong acid and, preferably, a chloride source (e.g., added as a salt or from hydrolysis of monochloroacetone) and some water may be added to help initiate the reaction.

- In a second aspect, the present invention is a process for preparing epichlorohydrin which comprises
  - (1) chlorinating acetone to form monochloroacetone;
  - (2) disproportionating the monochloroacetone in the presence of a platinum catalyst, optionally, a strong acid and, preferably, a chloride source (e.g., added as a salt or from hydrolysis of monochloroacetone) and some water to produce acetone and 1,3-dichloroacetone;
  - (3) hydrogenating the 1,3-dichloroacetone in the presence of a catalyst to produce 1,3-dichlorohydrin; and
- 15 (4) cyclizing the 1,3-dichlorohydrin with a base to produce epichlorohydrin.

Other aspects of the present invention will become apparent from the following detailed description and claims.

#### DETAILED DESCRIPTION OF THE INVENTION

The process of the present invention comprises the following steps:

#### (1) Chlorination

Chlorination of acetone to produce monochloroacetone (MCA) is a well known process. See, for example, U.S. Patent 4,439,623 and U.S. Patent 3,397,240.

#### (2) Disproportionation

The monochloroacetone produced in step (1) is subjected to a disproportionation reaction to produce both acetone and 1,3-dichloroacetone, in the presence of a platinum catalyst, optionally a strong acid and, preferably, a chloride source (e.g., added as a salt or from hydrolysis

of monochloroacetone) and some water. The products may be recovered by known methods, such as extraction or distillation.

Surprisingly, it has been found that heating monochloroacetone with a specific type of catalyst, which is a platinum catalyst, produces acetone and 1,3-dichloroacetone simultaneously, without producing any significant amount of 1,1-dichloroacetone or higher chlorinated by-products.

invention include any platinum +2 and/or +4 catalysts. Such catalysts are described in U.S. Patent 6,262,280, incorporated herein by reference. Examples of suitable catalysts include PtCl<sub>2</sub> and its hydrate, or an alkali metal salt (or its hydrate) of the PtCl<sub>4</sub>-2, PtO<sub>2</sub>, chloroplatinic acid, ammonium chloroplatinate, polyamine platinum salts and the like. It is not necessary for the catalysts to be complexed with ligands such as, for example, siloxane complexes.

Preferably, the catalysts employed in the practice 20 of the present invention, are platinum salts. The platinum catalyst is present in a homogeneous form regardless of whether or not it is added as an insoluble salt. If some of the platinum catalyst is leached into the reaction mixture a reaction takes place. If no platinum is leached into the 25 reaction mixture (based on Pt analyses of the liquid phase of the reaction mixture), no reaction takes place. While not wishing to be bound by theory, it is believed that this reaction is related to what goes on in the Shilov-type reaction, described in Luinstra, G.A.; Wang, L.; Stahl, S.S.; 30 Labinger, J.A.; Bercaw, J.E. J. Organometallic Chem 1995, 504, 75-91, "C-H activation by aqueous platinum complexes: A mechanistic study."

25

30

### (3) Hydrogenation

A key feature of the present invention is to hydrogenate the 1,3-dichloroacetone without removing a chlorine atom through the formation of HCl. Such

5 hydrogenation process is described in US Patents 5,744,655, and 6,350,922, both of which are incorporated herein by reference. The hydrogenation catalysts can be homogeneous or heterogeneous with heterogeneous being most preferred. Use of a heterogeneous catalyst minimizes or eliminates the need to isolate the catalyst for continued use.

The 1,3-dichloroacetone produced in Step (2) is hydrogenated by reaction with a hydrogenating agent to produce 1,3-dichlorohydrin.

The hydrogenating agent useful in the present invention may be, for example, molecular hydrogen, an alcohol, or a combination thereof. The hydrogenating agent is preferably molecular hydrogen.

Examples of suitable alcohols useful in the present invention can be primary or secondary alcohols such as methanol, ethanol and  $C_3$ - $C_{10}$  primary and secondary alcohols. Preferably, the alcohol is methanol. Examples of other secondary alcohols useful in the present invention are described in U.S. Patent No. 2,860,146 which is incorporated herein by reference.

The maximum quantity of hydrogenating agent source is not critical and is governed by practical considerations such as pressure, reactor efficiency, and safety. When the hydrogenating agent source is gaseous, then the quantity of hydrogenating agent is preferably at least enough to provide the desired pressure. However, in most cases, the reactor preferably contains no more than about 1,000 moles of molecular hydrogen per mole of  $\alpha$ -chloroketone and more preferably contains no more than about 100 moles of molecular

25

30

hydrogen per mole of  $\alpha$ -chloroketone. Gaseous hydrogenating agent sources, such as molecular hydrogen, are preferably used according to known methods for mixing a gaseous reagent with a liquid reaction mixture, such as bubbling the gas through the mixture with agitation or solubilizing the hydrogen under pressure.

The hydrogenation reaction of the present invention takes place in the presence of a heterogeneous transition metal-containing catalyst.

The transition metal useful as the heterogeneous catalyst of the present invention may be one or more metals selected from any of Groups IB, IIB or IIIA-VIIIA on the periodic table of elements, as currently adopted by the International Union of Pure and Applied Chemistry (IUPAC), which is incorporated herein by reference. The catalyst metal is preferably selected from Group VIIIA of the IUPAC periodic table, including for example, iron, cobalt, nickel, ruthenium, rhodium, palladium, osmium, iridium, platinum and mixtures thereof. The catalyst metal is most preferably platinum.

The temperature of the reaction is not critical, provided that all of the reagents, aside from the hydrogen, remain liquid and in contact with each other. However, low temperatures require longer reaction times and lead to increased levels of impurities. The reaction temperature is preferably at least about -10°C, more preferably at least about 20°C and most preferably at least about 50°C. The reaction temperature is preferably less than about 250°C, more preferably no more than about 100°C and, most preferably no more than about 85°C.

The reaction pressure is not critical as long as there is sufficient hydrogen to run the reaction in the reaction mixture. The pressure is preferably at least about


10

14 psi (97 kPa, 1 atmosphere) and more preferably at least about 50 psi (340 kPa, 3.4 atmospheres). The pressure is preferably no more than about 3,000 psi (21 MPa, 220 atmospheres). Higher pressures lead to shorter reaction times.

## (4) Ring-Forming or Cyclizing Step

The 1,3-dichlorohydrin produced in step (3) is cyclized to produce epichlorohydrin by contacting it with a strong base, such as an aqueous alkali metal hydroxide, including, for example, sodium hydroxide. This step is well known in the art of manufacturing epihalohydrin. See, for example, U.S. Patent 2,860,146, incorporated herein by reference.

The process of the present invention can be represented by the following general equation:

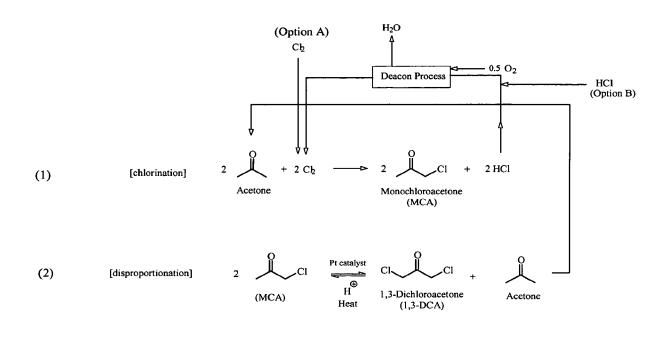

(3) [hydrogenation] 
$$Cl$$
  $+$   $H_2$   $\xrightarrow{\text{catalyst}}$   $Cl$   $Cl$   $Cl$   $Cl$   $I,3$ -dichlorohydrin (1.3-DCH)

The Deacon Process comprises producing chlorine by direct oxidation of gaseous HCl with  $\mathrm{O}_2$  in the presence of a  $\mathrm{CuCl}_2$  catalyst. This process is described by the overall chemical equation:

$$HCl(g) + \frac{1}{4}O_2 (g) \rightarrow \frac{1}{2}H_2O(g) + \frac{1}{2}Cl_2 (g).(1)$$

Reaction (1) in the presence of a CuCl<sub>2</sub> catalyst is a fast overall exothermic process, which is expected to reach equilibrium under normal industrial operating conditions of 700°K to 750°K.

The following working examples are given to illustrate the invention and should not be construed as limiting its scope. Unless otherwise indicated, all parts and percentages are by weight.

#### EXAMPLES 1 to 4

#### GC Conditions

GC: HP 5890 II with FID and 6890 auto-injectors (Front detector)

5 Column: Rtx-35, Restek Corp., Cat # 10453, ser# 441628 Column type: 35% diphenyl - 65% dimethyl polysiloxane

Column dimensions:  $30m \times 0.25 mm \times 1.0 um$ 

Head pressure: 25 psi

Split vent flow: 50 mL/min

10 Purge gas flow: 4 mL/min

Air flow: ~300 mL/min

Hydrogen flow: 30 mL/min

Make-up flow: 30 mL/min (column flow ~4 mL/min)

Temperature ramp: 55°C for 4 min hold, +15°C/min to 250°C

15 for 10 min.

Run time: 27 minutes

Injector volume: 0.5 uL (5 uL syringe)

Injector temp: 200°C Detector temp: 290°C

20 Solvent washes: A= acetonitrile, B= 50/50

acetonitrile/water

Integrator: HP ChemStation

The disproportionation reactor is a 4-dram vial equipped with a magnetic stir bar. Monochloroacetone is added to the reactor which contains water, a catalyst as shown in Table I and a strong acid and preferably a chloride salt. The relative amounts of the materials are shown in Tables I-IV. The mixture is stirred and then heated at about 95 to 100°C for about 17 hours. The product is cooled to

or room temperature. Ten drops of the filtrate is diluted to 1 mL with acetonitrile, then filtered through a disposable syringe filter and analyzed by gas chromatography. The amounts of products produced are reported by GC area percentages as shown in Tables I to IV (EXAMPLES 1 to 4,

35 respectively).

TABLE I: Results for MCA with Different Non-supported Catalysts (NOTE: All samples contain MCA and catalyst. Water added to all reaction mixtures.)

Catalyst	Moles	Moles	Moles H20/	Area%	Area%	Area%	Area%	Area %
	cat./Moles	Cl/Moles	Moles MCA	MCA	1,3-DCA	1,1,3-TCA	1,1-DCA	Acetone
	MCA	MCA		Remaining				
HHCP (aq)*	0.0021	0.013	0.57	81	6.4	0.01	2.36	8
PtCl <sub>2</sub>	0.0025	0.0051	0.17	61	11.3	0.06	2.22	10.1
PtO <sub>2</sub>	0.0025	0	0.15	65	11.3	0.05	2.24	9.3
PtCl <sub>2</sub> /	0.0026	0.0046	0.06	59	10.0	0.05	2.34	7.96
$H2Pt(OH)_6**$								
Pt powder	0.0030	0.0093	0.15	94	0.27	0.00	2.03	1.71
CoCl <sub>2</sub>	0.0027	0.0054	0.15	94	0.27	0.01	2.06	1.77
CuCl <sub>2</sub>	0.0026	0.0051	0.16	92	0.28	0.00	2.05	1.77
CuCl <sub>2</sub>	0.0026	0.0053	0.14	95	0.28	0.00	2.05	1.06
(repeat)								
CuC1	0.0027	0.0055	0.16	94	0.28	0.00	1.97	1.69
FeCl <sub>3</sub>	0.0024	0.0047	0.16	94	0.27	0.01	2.03	1.99
HgCl <sub>2</sub>	0.0024	0.0047	0.15	94	0.27	0.01	2.03	1.94
IrCl <sub>3</sub>	0.0024	0.0047	0.14	95	0.26	0.00	2.01	0.50
IrCl <sub>4</sub>	0.0025	0.0050	0.14	94	0.26	0.01	2.05	1.76
PdCl <sub>2</sub>	0.0024	0.0047	0.17	94	0.27	0.01	2.03	1.93
RuCl <sub>2</sub>	0.0023	0.0047	0.14	95	0.26	0.00	1.85	1.73
RhCl <sub>2</sub>	0.0022	0.0045	0.17	94	0.27	0.02	2.03	1.67
T1C13	0.0029	0.0057	0.15	94	0.27	0.01	2.03	1.83
TlCl	0.0026	0.0052	0.16	95	0.26	0.00	2.02	0.72
ZrCl <sub>4</sub>	0.0030	0.0061	0.13	71	0.35	0	3.09	2.62
MCA only	NA	NA	NA	95	0.17	0.00	2.28	0

<sup>\*</sup>HHCP = hydrogen hexachloroplatinate (IV), 8 wt% solution in water. Formula weight  $H_2PtCl_6 = 409.82$ . \*\*The PtCl2 contributed ~46% of the moles of Pt.

The data in Table I show that only the Pt(+2) and Pt(+4) catalysts produced significant amounts of 1,3-dichloroacetone without producing any significant amounts of 1,1-dichloroacetone or higher chlorinated by-products.

5

<sup>•</sup> A source of a strong acid is preferred at the beginning of the reaction. It helps to accelerate the reaction.

TABLE II: Results for MCA with PtO<sub>2</sub> (with and without HCl) vs Time (NOTE: All samples contain MCA (2g). 5 wt% HCl was used with PtO<sub>2</sub> and 11 wt% HCl was used with Pt/carbon)

	Time (hours)	Moles Pt / Moles MCA	Moles Cl / Moles MCA	Moles H20 / Moles MCA		Area% 1,3-DCA	Area% 1,1,3-TCA	Area% 1,1- DCA
PtO <sub>2</sub> (no HCl)	6.5	0.0027	0	0.15	92	1.0	0.01	2.05
PtO <sub>2</sub> (with HCl)	6.5	0.0027	0.0076	0.29	79	7.8	0.02	2.07
PtO2 (no HCl)	~22.5	-	0	-	60	11.2	0.05	2.31
PtO2 (with HCl)	~22.5	-	0.0076	-	65	11.3	0.05	2.24
MCA only	NA	NA	NA	NA	95	0.17	0	2.28

The data in Table II indicate that adding HCl to the reaction mixture in the presence of a platinum catalyst early in the reaction (6.5 hours after start of reaction) helps get the reaction started sooner.

TABLE III: Results for MCA with Different Acids (NOTE: All samples contain MCA (2g), 5 wt% Pt on carbon (0.2 g), acid and water)

15

10

Acid	Moles Pt /	Moles Cl /	Moles H20 /	Area% MCA	Area% 1,3-	Area%	Area%
	Moles MCA	Moles MCA	Moles MCA	Remaining	DCA	1,1,3-TCA	1,1-DCA
HCl	0.0023	0.029	0.468	73	10	0.04	2.32
H <sub>2</sub> SO <sub>4</sub>	0.0026	0	0.549	90	2	0.02	1.99
p-TSA	0.0025	0	0.457	80	3	0.01	2.37
hydrate*							
MCA only	NA	NA	NA	95	0.17	0	2.28

<sup>\*</sup>p-TSA = para-toluenesulfonic acid dihydrate

The data in Table III indicate that HCl performs 20 better than the other strong acids for running the disproportionation reaction.

TABLE IV: Results for MCA with 5 wt% Pt on carbon catalyst and LiCl (NOTE: All samples contain MCA (2g) and 5 wt% Pt on carbon (0.2g))

	Moles p-TSA* /	Moles Cl /	Moles H20 /	Area% MCA	Area% 1,3-	Area%	Area%
	Moles MCA	Moles MCA	Moles MCA	Remaining	DCA	1,1,3-	1,1-
						TCA	DCA
MCA only	NA	NA	NA	95	0.17	0.00	2.28
LiCl (dry)	0	0.228	0	85	5	0.03	2.15
LiCl + Water	0	0.156	0.450	84	6	0.02	2.11
LiCl + p-TSA	0.051	0.255	0.102	63	15	0.11	2.28
p-TSA only	0.052	0	0.104	63	0.22	0.02	3.18

<sup>\*</sup>p-TSA = para-toluenesulfonic acid dihydrate

The data in Table IV indicate that a chloride salt helps generate the disproportionation reaction.

#### WHAT IS CLAIMED IS

- A process for producing 1,3-dichloroacetone which comprises (1) chlorinating acetone to form monochloroacetone, and
- (2) disproportionating the monochloroacetone in the presence of a platinum catalyst, a chloride source, water and, optionally, a strong acid to produce acetone and 1,3-dichloroacetone.
- 2. The process of Claim 1 wherein the platinum 10 catalyst is selected from the group consisting of  $PtCl_4^{-2}$ ,  $PtO_2$ , chloroplatinic acid, ammonium chloroplatinate, and polyamine platinum salts.
  - 3. The process of Claim 1 wherein the strong acid is hydrochloric acid.
- 4. A process for producing epichlorohydrin which comprises (1) chlorinating acetone to form monochloroacetone; (2) disproportionating the monochloroacetone in the presence of a platinum catalyst, a chloride source, water and, optionally, a strong acid to produce acetone and 1,3-
- dichloroacetone; (3) hydrogenating the 1,3-dichloroacetone in the presence of a catalyst to produce 1,3-dichlorohydrin; and (4) cyclizing the 1,3-dichlorohydrin with a base to produce epichlorohydrin.
- 6. The process of Claim 5 wherein the hydrogenating agent is molecular hydrogen, an alcohol, or a combination thereof.
  - 7. The process of Claim 5 wherein the catalyst is a heterogeneous transition metal-containing catalyst.
- 8. The process of Claim 5 wherein the 30 hydrogenating agent is molecular hydrogen.

- 9. The process of Claim 5 wherein the 1,3-dichloroacetone produced in step (2) is hydrogenated without removing a chlorine atom through the formation of HCl.
- 10. The process of Claim 5 wherein the 1,3-5 dichlorohydrin produced in step (3) is cyclized to produce epichlorohydrin by contacting it with a strong base.
  - 11. The process of Claim 5 wherein the strong base is an aqueous alkali metal hydroxide.

#### ABSTRACT

Epichlorohydrin is produced from acetone by (1) chlorinating acetone to form monochloroacetone; (2) disproportionating the monochloroacetone in the presence of a platinum catalyst, a strong acid and preferably a chloride source (e.g., added as a salt or from hydrolysis of monochloroacetone) and some water to produce acetone and 1,3-dichloroacetone; (3) hydrogenating the 1,3-dichloroacetone in the presence of a catalyst to produce 1,3-dichlorohydrin; and (4) cyclizing the 1,3-dichlorohydrin with a base to produce epichlorohydrin.